

WLB32ZC570PBQMI


LED Linear Light – In the Metal Housing

Features

- Cascadable
- ON/OFF switch
- Operating voltage: 90...264 VAC
- Country-specific connection cable for China, Australia and New Zealand included in delivery
- Color: White

Functional principle

The energy-efficient LED work lights are ideally suited for industrial applications. The color temperature lies in the range of daylight, between 5,000 and 10,000 Kelvin. Despite the new, very bright LED-technology there is no glare. The lights can be easily daisy-chained, whereby each light can be switched off, 50% or 100 % luminosity with the DIP switch. The new technology provides a 40% higher energy efficiency than comparable lights. These rugged lights in a metal housing are suitable for a wide range of applications, for example as machines or task lighting. The assembly is done via magnetic or snap-on brackets. The work lights are available in four different lengths. For the AC variants there is a large variety of country-specific connectors available.

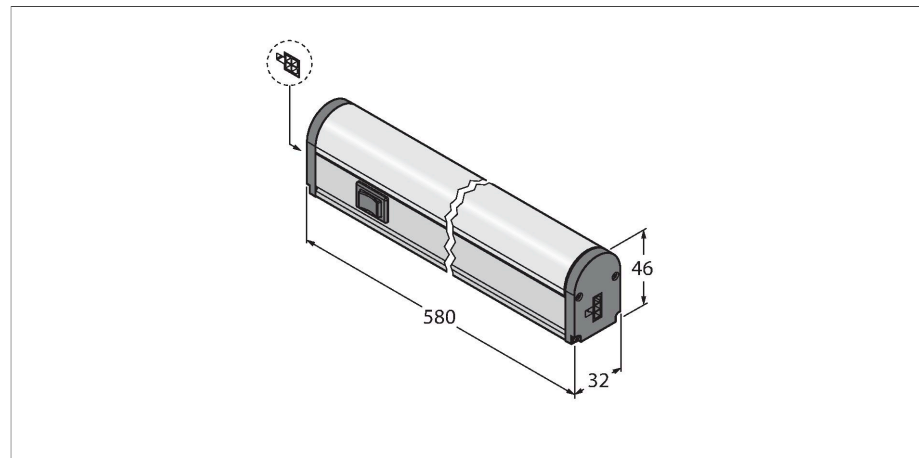


Technical data


Type	WLB32ZC570PBQMI
ID	3089958
Signal and display data	
Purpose	LED work light
Function	Linear light
Light type	White
Color temperature	4700...+5300 K
Luminous flux lumen	1200 lm
LED service life (L70)	50000 h
Dimmable	Two-stage
Features of color 1	White, Permanently on, 1500 lm
Electrical data	
Operating voltage U_b	90...264 VAC
Mechanical data	
Cascadable	Yes
Design	Rectangular, WLB32
Dimensions	580 x 32 x 46 mm
Housing material	Metal, AL
Window material	Polycarbonate, diffuse
Electrical connection	Connector, PVC
Number of cores	3
Ambient temperature	-25...+45 °C
Protection class	IP50
Tests/approvals	
Shock resistance	15 g (11 ms)
Approvals	CE, UL

Accessories

LMBWLB32	3090623
Snap bracket for WLB32 work light, included in the WLB92 scope of delivery	



LMBWLB32MAG	3087851
Snap bracket for WLB32 work light, for mounting on metal surfaces	



LMBWLB32-180S	3087852
Snap bracket for WLB32 work light, rotatable up to 180° degrees	

Accessories

Dimension drawing	Type	ID	
	LQMAC-306B	3085576	Connection cable, 3-pin, on NEMA 5-15 grounded plug (IEC type B), for US, Canada, Japan, Puerto Rico, Taiwan, included in the scope of delivery
	LQMAC-306	3086779	Connection cable, 3-wire, stranded wire
	LQMAEC-306SS	3085580	Extension cable to cascade WLB32 lights, length 1.83 m, optional